# Getac

## X600 Server ACCESSORY SPEC BROCHURE



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel: +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | www.getac.com/en/

## **BACKPACK**

### **Features & Benefits**

Constructed of durable Nylon, and featuring an adjustable padded shoulder strap, this backpack provides sturdy protection for your fully rugged notebook while giving maximum comfort. The functional pockets inside offer the optimal solution to transport the notebook and needed accessories together in one case, delivering extra convenience to mobile professionals.

#### **Product Information**

Dimensions: 450 x 330 x 230mm Main Material: Nylon 1000D

#### **SKU ID**

GMBPX1



## **EXTERNAL DUAL BAY BATTERY CHARGER**

### **Features & Benefits**

This external dual-bay battery charger is designed to charge up to 2 batteries at the same time. It provides you the benefit of charging and storing two batteries together when there is limited space and power sockets.

#### **Product Information**

AC Input: 100V~240V

DC Output: 13.05V, 2.4A Max. Number of charge bay: 2 Bay

Dimensions: L 160 x W 180 x H 72.5mm

Weight: 1.2kg

#### **SKU ID**

Main Battery + Multimedia Bay Battery	Two Main Batteries
GCMCEK (EU Power Cord) GCMCUK (US Power Cord) GCMCKK (UK Power Cord) GCMCAK (AU Power Cord) GCMCCK (CHN Power Cord) GCMCTK (TW Power Cord) GCMCIK (IN Power Cord)	GCMCEJ (EU Power Cord) GCMCUJ (US Power Cord) GCMCKJ (UK Power Cord) GCMCAJ (AU Power Cord) GCMCCJ (CHN Power Cord) GCMCTJ (TW Power Cord) GCMCIJ (IN Power Cord)





## **SPARE MAIN BATTERY**

### **Features & Benefits**

Getac Spare Main Battery is designed to provide the main power source for your device when the AC adapter is not connected / charged.

#### **Product Information**

Battery type: Lithium-ion Cell designation: 3S2P Output Voltage: 10.8V Capacity: 6900mAh

Battery Dimensions and Weight: L 142.1 x W 72 x H 20.1mm, 350g

#### **SKU ID**

GBM6X8



## 230W AC ADAPTER

### **Features & Benefits**

This adapter is designed to power the notebook and charge its internal battery from an AC power source. A country-specific power cord is included with the adapter to fit the local power outlet in your designated country.

#### **Product Information**

Input Voltage : 100V-240V AC Output Voltage : 19.5VDC

Output Current: Max 11.79A, 230W

Adapter Dimensions & Weight: L 177 x W 86 x H 32.2mm, 650g

Adapter Output Cord Length : 1500mm Adapter Power Supply Cord Length : 1800mm

#### **SKU ID**

GAA8E1 (EU Power Cord) GAA8U1 (US Power Cord) GAA8K1 (UK Power Cord) GAA8A1 (AU Power Cord) GAA8C1 (CHN Power Cord) GAA8T1 (TW Power Cord) GAA8I1 (IN Power Cord)



### 230W MIL-STD-461 AC ADAPTER

### **Features & Benefits**

The 230W MIL-STD-461 AC adapter has passed the military standard and testing specification to ensure the conducted emissions (CE), conducted susceptibility (CS), radiated emissions (RE), and radiated susceptibility (RS) of the adapter can meet the requirements for the control of electromagnetic interference.

#### **Product Information**

Input Voltage : 100V-240V AC Output Voltage : 19.5VDC

Output Current: Max 11.8A (230W)

Adapter Dimensions and Weight: L 256 x W 98 x H 57mm, 1.9kg

Adapter Output Cord Length : 1530mm Adapter Power Supply Cord Length : 1800mm

230W MIL-STD-461 AC adapter is designed to charge single device at a time only.

#### **SKU ID**

GAAGE6 (EU Power Cord) GAAGU6 (US Power Cord) GAAGK6 (UK Power Cord) GAAGA6 (AU Power Cord) GAAGC6 (CHN Power Cord) GAAGT6 (TW Power Cord) GAAGI6 (IN Power Cord)



## **CAPACITIVE STYLUS PEN & TETHER**

### **Features & Benefits**

This capacitive hard tip stylus is lightweight and easy to control, allowing smooth and comfortable interaction with the touch screen without worrying about scratching the screen or leaving fingerprints on it. The stylus comes with a detachable tether to keep the stylus attached to the device, so it doesn't get lost or misplaced.

#### **Product Information**

Stylus Dimensions: 111mm; Ø9mm

Tip size: 3.8mm; Ø3.5mm Tether Length: 304mm

#### **SKU ID**

**GMPSXE** 



## **GETAC DS100 USB-C DOCKING STATION**

### **Features & Benefits**

The Getac DS100 USB-C Docking Station, featuring a slim and compact design, seamlessly consolidates cables on the workstation. This allows users to swiftly create a personalized workspace and organize their daily office environment. Compatible with various Getac laptop and tablet models, it provides extra connectivity and multiple I/O ports for additional peripherals and data sources. With support for MAC Address Pass-Through, Wake-on-LAN (WoL), and PXE Boot, the DS100 aids IT administrators in maintaining a secure, efficient, and well-managed network infrastructure. (The docking station's performance, including transfer speeds and display capabilities, may be limited by chipset and operating system when used with Getac Android systems. See the user manual for details.)

#### **Product Information**

Dimensions: L 207 x W 90 x H 31mm (8.15" x 3.54" x 1.22")

Weight: 335g (0.74lbs)

Power Cable Length: 1.8m (5.9ft)

USB-C Upstream Cable Length: 1m (3.28ft)

I/O Ports: DC in Jack x 1, Audio in/out combo x 1, USB 2.0 x 2, USB 3.2 Gen 1 Type-A x 3, USB 3.2 Gen 2 Type-C x 2, LAN x 1, HDMI 2.0 x 1,

Display port x 2

#### **SKU ID**

GDDSE1 (EU Power Cord)

GDDSU1 (US Power Cord)

GDDSK1 (UK Power Cord)

GDDSA1 (AU Power Cord)

GDDSC1 (CHN Power Cord)

GDDST1 (TW Power Cord)

GDDSI1 (IN Power Cord)





## LCD SCREEN PROTECTION FILM

### **Features & Benefits**

This screen protection film is cut precisely to fit the device and is easy to install and remove without leaving a sticky residue. With anti-glare coating, it not only protects the screen from the rigors of daily use but also help diffuses light on the screen and reduces glare, providing effortless readability for displayed information under common ambient lighting conditions.

#### **Product Information**

Dimensions: L 345.7 x W 195.3mm

Main Material : PET

#### **SKU ID**

**GMPFXU** 



## **SPARE MAIN STORAGE**

### **Features & Benefits**

Getac Spare Main Storage with canister is designed to provide you the ease of installation and allow you to remove your confidential data when your device is sent for service.

#### **Product Information**


Capacity: PCle 1TB/2TB

Dimension: L 110.8 x W 30.2 x H 5.7mm

Weight: 37.8g

#### **SKU ID**

GSSGX8 (1TB Enterprise PCle SSD) GSSHX6 (2TB Enterprise PCle SSD)

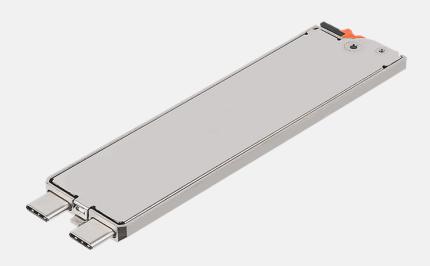

## X-BAY SSD KIT

### **Features & Benefits**

The X Bay SSD Kit is with canister is designed to provide you the ease of installation and allow you to remove your confidential data when your device is sent for service.

#### **Product Information**

Capacity: SATA 1TB/2TB

Dimension: 141 x 28.85 x 5.8 mm

Weight: 42.15g

#### **SKU ID**

GSS8XF (1TB Enterprise SATA SSD) GSSDX3 (2TB Enterprise SATA SSD)



## **BLU-RAY SUPER MULTI DRIVE**

### **Features & Benefits**

The Blu-Ray super multi drive is an optical disk drive that can read and write for different kinds of optical disks. It allows the user to access a variety of different media formats. Besides, It is a user-removable module that can be installed without tools.

#### **Product Information**

Dimension: L 147.4 x W 135 x H 14.4mm Weight: 157.4g

#### **SKU ID**

**GSROXB** 



## **DVD SUPER MULTI DRIVE**

### **Features & Benefits**

The DVD Super Multi Drive is an optical disk drive that can read and write for different kinds of optical disks. It allows the user to access a variety of different media formats. Besides, It is a user-removable module that can be installed without tools.

#### **Product Information**

Dimension: L 147.4 x W 135 x H 14.4mm

Weight: 157.4g

#### **SKU ID**

**GSROXA** 



## **150W AC ADAPTER**

### **Features & Benefits**

This adapter is designed to power the notebook and charge its internal battery from an AC power source. A country-specific power cord is included with the adapter to fit the local power outlet in your designated country.

#### **Product Information**

Input Voltage : 100V-240V AC Output Voltage : 19VDC

Output Current: Max 7.89A, 150W

Adapter Dimensions & Weight: L 151.3 x W 75.6 x H 25.4mm, 485g

Adapter Output Cord Length : 1800mm Adapter Power Supply Cord Length : 1830mm

#### **SKU ID**

GAA1E3 (EU Power Cord) GAA1U3 (US Power Cord) GAA1K3 (UK Power Cord) GAA1A3 (AU Power Cord) GAA1C3 (CHN Power Cord) GAA1T3 (TW Power Cord) GAA1I3 (IN Power Cord)

