


ZX10 FULLY RUGGED TABLET



- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- Dual hot-swappable batteries for uninterrupted operation
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended¹



ZX10 3D demo

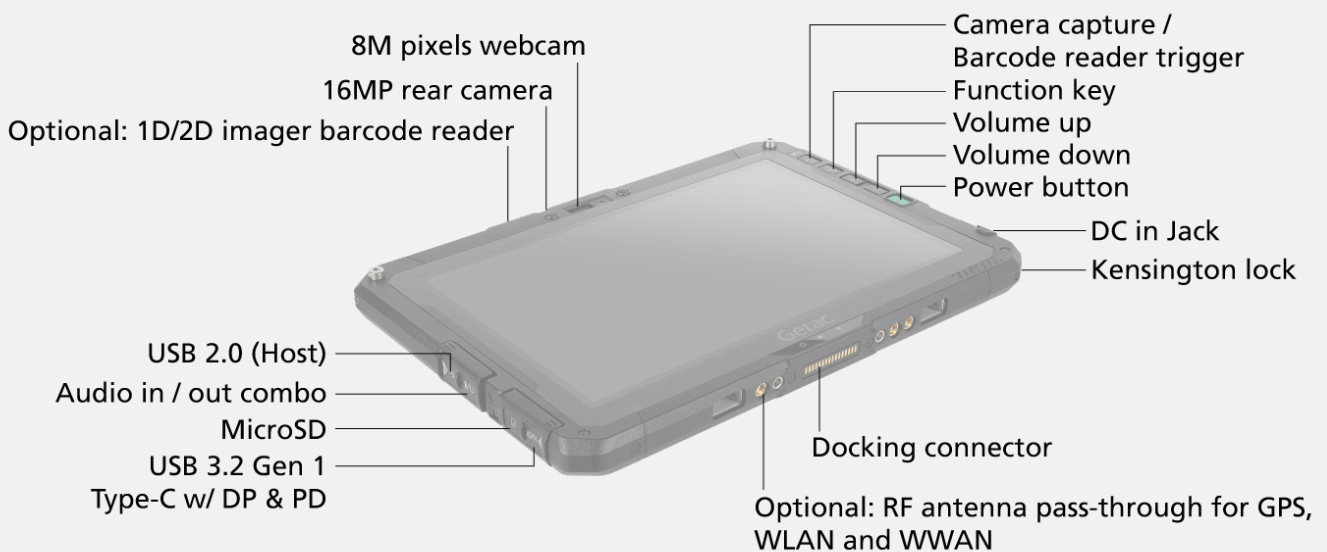

SPECIFICATIONS

Operating System

Android™ 12.0ⁱ

Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz Max. 2.2GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

10.1" TFT LCD WUXGA (1920 x 1200)
Protection film
800 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

4GB LPDDR4, 64GB eMMC
Optional: 6GB LPDDR4, 128GB eMMC

Device Button

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: HF RFID/NFC combo readerⁱⁱ

I/O Interface

8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
USB 2.0 (Host) x 1
MicroSD x 1
Docking connector x 1
Optional: SIM card slot x 2 (Micro-SIM, 3FF)^{iv}
Optional: RF antenna pass-through for GPS and WWAN

Communication Interface

Wi-Fi 802.11ac
Bluetooth (v5.0)ⁱⁱⁱ
Dedicated GPS
Optional: 4G LTE mobile broadband sup>iv/sup>
Dual Micro SIM^{iv}

Security Feature

Kensington lock
Optional: Smart card reader
Optional: HF RFID/NFC combo readerⁱⁱ

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery(3.84V, typical 4990mAh;
min. 4870mAh)x 2
LifeSupport battery swappable technology
Optional: High capacity Li-ion battery
(3.84V, typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")
1.04kg (2.29lbs)^v

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

Environmental Specification

Temperature^{vi}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications
(Search, Chrome, Gmail, Maps, YouTube, Play,
Drive, YouTube music, Google TV, Duo and photos)
Getac Diagnostic Tool
Getac Monitoring (trial version) agent/SDK
Getac Management (trial version) agent/SDK

Optional software

Getac Driving Safety Utility
Getac Monitoring
Getac Management
Getac OEMConfig

Accessories

Battery (3.84V, typical 4990mAh; min. 4870mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether

Optional:

Carry bag
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery (3.84V, typical 9980mAh;
min. 9470mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC, 50/60Hz)
Office dock AC adapter (65W, 100-240VAC)
DC-DC vehicle adapter (120W, 22-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Keyboard dock
Vehicle dock^{vii}
Office dock
100W Type-C adapter

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days. Standard 3 years

Standard

3 years Bumper-to-Bumper

ZX10 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Units with 4G LTE option come with two embedded SIM card slots.
- V. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- VI. Tested by an independent third-party test lab following MIL-STD-810H.
- VII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Office Dock (Pogo)	Vehicle Dock(Havis, Gamber-Johnson)	Vehicle Dock(RAM Mounts)
Serial Port	-	-	-
Microphone	1	1	-
Audio Output	1	1	-
DC in Jack	1	1	1
USB	USB 2.0 x 3	USB 2.0 x 2	USB 2.0 x 1 or USB 2.0 x 2
LAN	1	-	-
HDMI	1	-	-
RF Pass-through	-	3 (WWAN, WLAN, GPS)	-
Kensington Lock	-	-	-

Getac



GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,
Nangang Rd., Nangang Dist., Taipei City,
115018, Taiwan, R.O.C. Tel : +886 2 2785
7888 globalmarketing@getac.com |
www.getac.com

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.