


## B360 Pro FULLY RUGGED LAPTOP

- "AI-ready" avec les derniers processeurs Intel® Core™ Ultra (série 2) et la technologie Intel® AI Boost.
- Contrôleur graphique NVIDIA® Quadro® RTX A500 4 Go (en option)
- Certification MIL-STD 810H et IP66, avec résistance aux chutes de 1,8 m (6 pi) ainsi qu'au brouillard salin (en option)
- Écran tactile capacitif LumiBond Full HD de 13,3" avec technologie de lecture en plein soleil Getac (1 400 nits)
- Sécurité d'entreprise améliorée avec le double stockage remplaçable par l'utilisateur, la caméra de reconnaissance faciale Windows Hello, le lecteur de code-barres 1D/2D intégré et de nombreuses autres options d'authentification multifacteur
- Technologie de batterie remplaçable à chaud LifeSupport

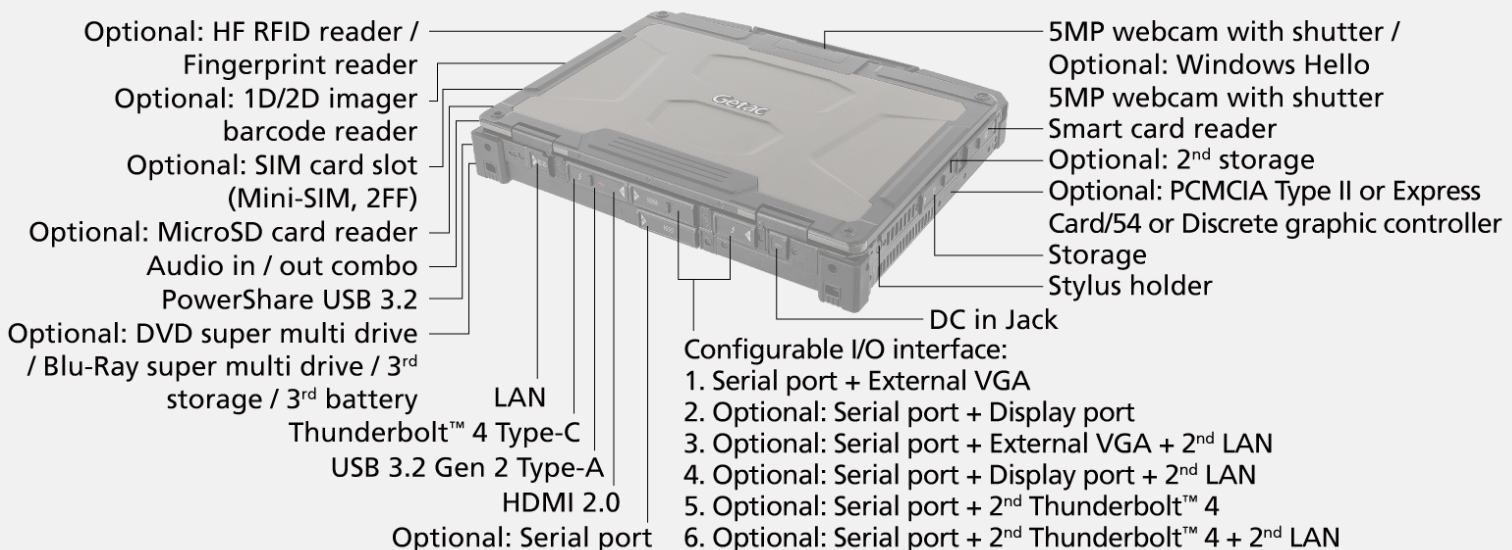

# SPECIFICATIONS

## Generation

G3

## Operating System

Windows 11 Pro

## Mobile Computing Platform

Intel® Core™ Ultra 5 processor 225H  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

## Platform options:

Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise  
Max. 5.0GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H  
Max. 5.1GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise  
Max. 5.3GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

## Graphics

Intel® Arc™ Graphics<sup>i</sup>  
Optional: NVIDIA® Quadro®  
RTX A500 4GB discrete graphic controller<sup>ii,iii</sup>

## NPU

Intel® AI Boost

## Display

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)  
Protection film  
1,400 nits LumiBond display with  
Getac sunlight readable technology  
Capacitive multi-touch screen

## Storage & Memory

16GB DDR5  
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2<sup>nd</sup> storage<sup>iv</sup>:  
256GB / 512GB / 1TB / 2TB PCIe NVMe SSD  
Optional multimedia bay storage : 1TB / 2TB SATA SSD

## Keyboard

LED backlit membrane keyboard

## Pointing Device

Touchscreen  
- Capacitive multi-touch screen

## Touchpad

- Touchpad with two buttons

## Expansion Slot

Smart card reader x 1  
Optional: Micro SD card reader x 1  
Optional: Discrete graphics controller, or PCMCIA Type II,  
or ExpressCard/54<sup>iii</sup>  
Optional: 1D/2D imager barcode reader

## Multimedia Bay

Configurable options<sup>v,vi</sup> :  
1. Optional: DVD super multi drive, or Blu-Ray super multi drive,  
or 3<sup>rd</sup> storage  
2. Optional: 3<sup>rd</sup> battery

## I/O Interface

5MP webcam x 1<sup>viii</sup>  
Audio in/out combo x 1  
DC in Jack x 1  
PowerShare USB 3.2 x 1  
USB 3.2 Gen 2 Type-A x 1  
Thunderbolt™ 4 Type-C x 1<sup>viii</sup>  
LAN (RJ45) x 1  
HDMI 2.0 x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Mini-SIM, 2FF)<sup>ix</sup>  
Optional: Windows Hello face-authentication  
5MP camera (front-facing) x 1<sup>viii</sup>  
Optional: RF antenna pass-through for GPS, WWAN and WLAN

## Configurable I/O options<sup>x</sup>:

1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1
6. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1
8. Serial port (9-pin; D-sub) x 2 + Display port x 1
9. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
10. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
11. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1
12. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1

## Security Feature

TPM 2.0  
Kensington lock  
Smart card reader  
Optional: Fingerprint reader<sup>xv</sup>  
Optional: HF RFID reader<sup>xv,xxi</sup>

## Power

AC adapter (90W, 100-240VAC, 50/60Hz)  
AC adapter (120W, 100-240VAC, 50/60Hz)<sup>ii</sup>  
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2  
Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1  
LifeSupport battery swappable technology

## Dimension (W x D x H) & Weight

342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")  
3.08kg (6.79lbs)<sup>xxii</sup>

## Rugged Feature

MIL-STD-810H certified  
IP66 certified  
MIL-STD-461G certified<sup>xxiii</sup>  
Vibration & 6ft (1.8m) drop resistant  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213  
(Class I, Division 2, Groups A, B, C, D)<sup>xxix</sup>  
Optional: Salt fog certified

## Environmental Specification

Temperature<sup>xx</sup> :  
- Operating: -29°C to 63°C / -20°F to 145°F<sup>xxi</sup>  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

## Pre-installed Software

Getac Utility  
Getac Geolocation  
Getac Barcode Manager<sup>xxii</sup>  
Optional: Absolute Persistence®

## Optional Software

Getac Driving Safety Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility<sup>xxiii</sup>

## Accessories

High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (90W, 100-240VAC)  
Capacitive stylus with tether

## Optional:

Carry bag  
High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (90W, 100-240VAC)  
AC adapter (120W, 100-240VAC)<sup>ii</sup>  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Capacitive stylus with tether  
Protection film  
Vehicle cradle<sup>xxiv</sup>  
Vehicle dock<sup>xxv</sup>  
Office dock  
Spare SSD kit  
100W Type-C adapter<sup>xxv</sup>

## Bumper-to-Bumper Warranty

Les accidents peuvent mettre votre équipement hors service au moment où vous vous y attendez le moins, en particulier dans un environnement difficile, ce qui peut entraîner des temps d'arrêt coûteux. C'est pourquoi Getac a introduit les dommages accidentels en standard dans notre nouvelle garantie Bumper-to-Bumper, pour aider à minimiser les coûts informatiques de votre entreprise. Bumper-to-Bumper est votre garantie sans souci. Cela signifie que vous pouvez compter sur nous pour remettre votre appareil en service en quelques jours.

## Standard

Garantie Bumper-to-Bumper de 3 ans

# B360 Pro FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive.
- IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- V. Option 1 and 2 are mutually exclusive.
- VI. Factory option. Not user swappable.
- VII. 5MP webcam and optional Windows Hello face-authentication 5MP camera (front-facing) are mutually exclusive options.
- VIII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. External VGA, Display port, and 2<sup>nd</sup> Thunderbolt™ 4 Type-C are mutually exclusive.
- XI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XIII. Only available in the US, UK, EU, Australia, and New Zealand.
- XIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XV. Fingerprint reader and HF RFID reader are mutually exclusive.
- XVI. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XVII. Weight and dimensions vary from configurations and optional accessories.
- XVIII. MIL-STD-461 90W AC adapter sold separately.
- XIX. Available with limited configurations and environment conditions.
- XX. Tested by an independent third-party test lab following MIL-STD-810H.
- XXI. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XXII. Available when barcode reader option is selected.
- XXIII. Models require either embedded or standalone GPS module.
- XXIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XXV. Do not support the configurations with discrete graphics card.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
10GbE/2000 base-T Ethernet	1	1
Intel® Wi-Fi 7 BE200, 802.11be		
Bluetooth (V5.4)	1	1
Optional Dedicated GPS with L1/L5 <sup>xii</sup>	1	1
Optional 4G LTE mobile broadband with integrated L1/L5 GPS <sup>xii</sup>	1	1
Optional 5G Sub-6 with integrated L1/L5 GPS <sup>xii, xiii</sup>		
Optional: Dual SIM (Mini-SIM, 2FF and e-SIM) <sup>ix, xiv</sup>		
Audio Output	-	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

# Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140  
Villebon sur Yvette Tel: +33 160 12 80 60  
Sales-Getac-France@getac.com |  
www.getac.com/fr/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.