


F110 FULLY RUGGED TABLET



- Processeur Intel® Core™ i5/i7 (13e génération)
- Sécurité d'entreprise améliorée avec la technologie Intel® vPro®, la caméra de reconnaissance faciale Windows Hello®, le standard TPM 2.0 et de nombreuses autres options d'authentification multifacteur
- Écran LumiBond 1200 nits avec technologie de lecture en plein soleil Getac
- Options configurables pour répondre à diverses exigences de collecte de données : lecteur de code-barres 1D/2D, port USB 2.0, port série + LAN
- Technologie de batterie remplaçable à chaud LifeSupport

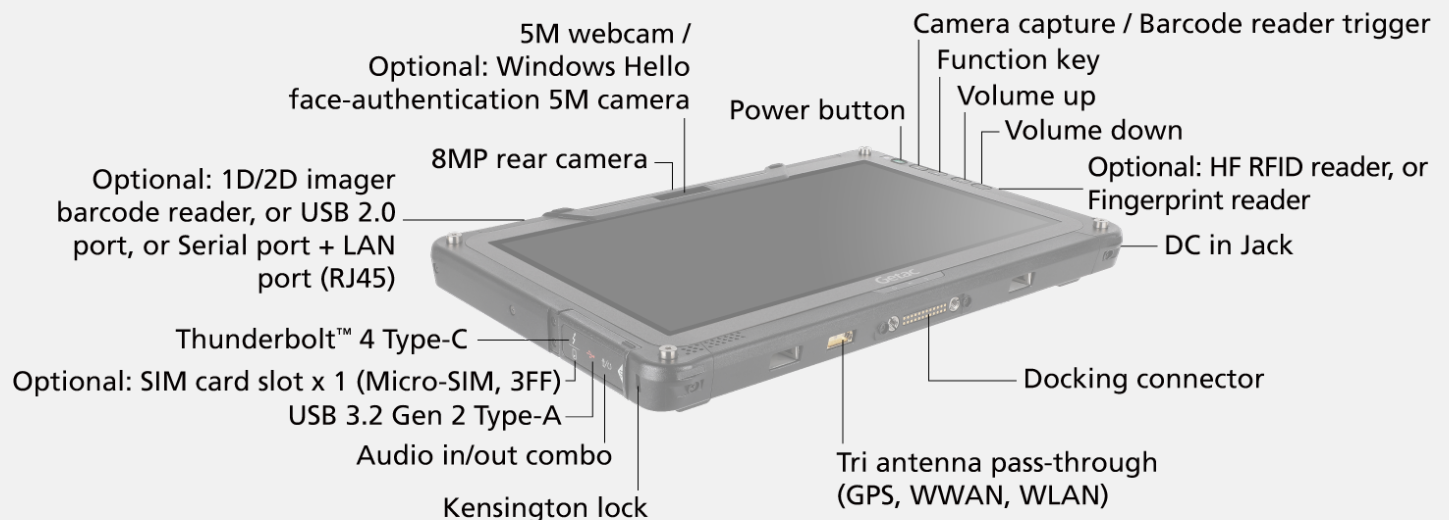

SPECIFICATIONS

Generation

G7

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1335U Processor
Max. 4.6GHz with Intel® Turbo Boost Technology
- 12 MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1345U vPro® Enterprise Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12 MB Intel® Smart Cache

Intel® Core™ i7-1355U Processor
Max. 5.0GHz with Intel® Turbo Boost Technology
- 12 MB Intel® Smart Cache

Intel® Core™ i7-1365U vPro® Enterprise Processor
Max. 5.2GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,200 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

8GB DDR5
Optional: 16GB/32GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional(top side): 1D/2D imager barcode reader, or USB 2.0 port, or LAN (RJ45), or MicroSD, or Serial port + LAN (RJ45) ⁱ
Optional(right side): HF RFID reader or Fingerprint reader ⁱⁱ
Optional(back side): Smart card reader

I/O Interface

5M webcam ⁱⁱⁱ
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
Docking connector x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ^v
Optional: Windows Hello face-authentication 5M camera (front-facing) x 1 ⁱⁱⁱ
Optional: RF antenna pass-through for GPS, WWAN, and WLAN, or GPS, WWAN main, and WWAN AUX

Communication Interface

Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3) ^{iv}
Optional: 10/100/1000 base-T Ethernet
Optional: Dedicated GPS
Optional: 4G LTE mobile broadband with integrated GPS ^{v,vi}
Optional: 5G Sub-6 with integrated L1/L5 GPS ^{v,vi}
Dual SIM (Micro-SIM 3FF and e-SIM) ^v

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: HF RFID Reader ^{ii,vi}
or Smart Card Reader, or Fingerprint Reader ⁱⁱ
Optional: Windows Hello face-authentication 5M camera (front-facing) ⁱⁱⁱ

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (11.4V, typical 2680mAh; min. 2640mAh) x 2
LifeSupport battery swappable technology
Optional: High capacity Li-ion battery (11.1V, typical 4200mAh) x 2

Dimension (W x D x H) & Weight

314 x 207 x 25mm (12.4" x 8.15" x 0.98")
1.49kg (3.29lbs) ^{viii}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{ix}
Vibration & 6ft (1.8m) drop resistant ^x
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) ^{xi}
Optional: Salt fog certified

Environmental Specifications

Temperature ^{xii} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xiii}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Persistence®

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ^{xiv}

Accessories

Battery (11.4V, typical 2680mAh; min. 2640mAh)
AC adapter (65W, 100-240VAC, 50 / 60Hz)
Capacitive stylus with tether

Optional:

Carry bag
Battery (11.4V, typical 2680mAh; min. 2640mAh)
High capacity Li-ion battery (11.1V, typical 4200mAh; min.4080mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC Adapter (90W, 100-240VAC, 50 / 60Hz)
AC adapter (65W, 100-240VAC, 50 / 60Hz)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
Hard handle
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard
Vehicle cradle ^{xv}
Vehicle dock ^{xv}
Office dock
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

F110 FULLY RUGGED TABLET

- I. 1D/2D imager barcode reader, USB 2.0 port, LAN (RJ45), MicroSD, Serial port + LAN (RJ45) are mutually exclusive options.
- II. HF RFID reader and fingerprint reader are mutually exclusive options
- III. 5M webcam and optional Windows Hello face-authentication 5M camera (front-facing) are mutually exclusive options.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VI. Support GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in USA, UK, EU, Australia, and New Zealand
- VII. 13.56MHz HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VIII. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 6mm (H), 0.24kg.
- IX. MIL-STD-461 90W AC adapter sold separately.
- X. Drop test results vary from configurations and optional accessories.
- XI. Available with limited configurations and environment conditions.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2024 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.