




B360 FULLY RUGGED LAPTOP

- Pronto per l'AI con i più recenti processori Intel® Core™ Ultra (Serie 2) e la tecnologia Intel® AI Boost
- Certificazioni MIL-STD 810H e IP66, classificazione per cadute fino a 1,8 m e opzione resistenza alla nebbia salina
- Display LumiBond FHD da 13,3" con tecnologia Getac per la leggibilità alla luce diretta del sole (1.400 nit) e touchscreen capacitivo
- Sicurezza aziendale avanzata con l'opzione doppio storage sostituibile dall'utente, e le opzioni Windows Hello face-authentication camera, lettore barcode 1D/2D integrato e autenticazioni multi-factor
- Tecnologia di sostituzione della batteria LifeSupport
- Opzioni I/O versatili, tra cui fino a due Thunderbolt™ 4 e soluzioni docking

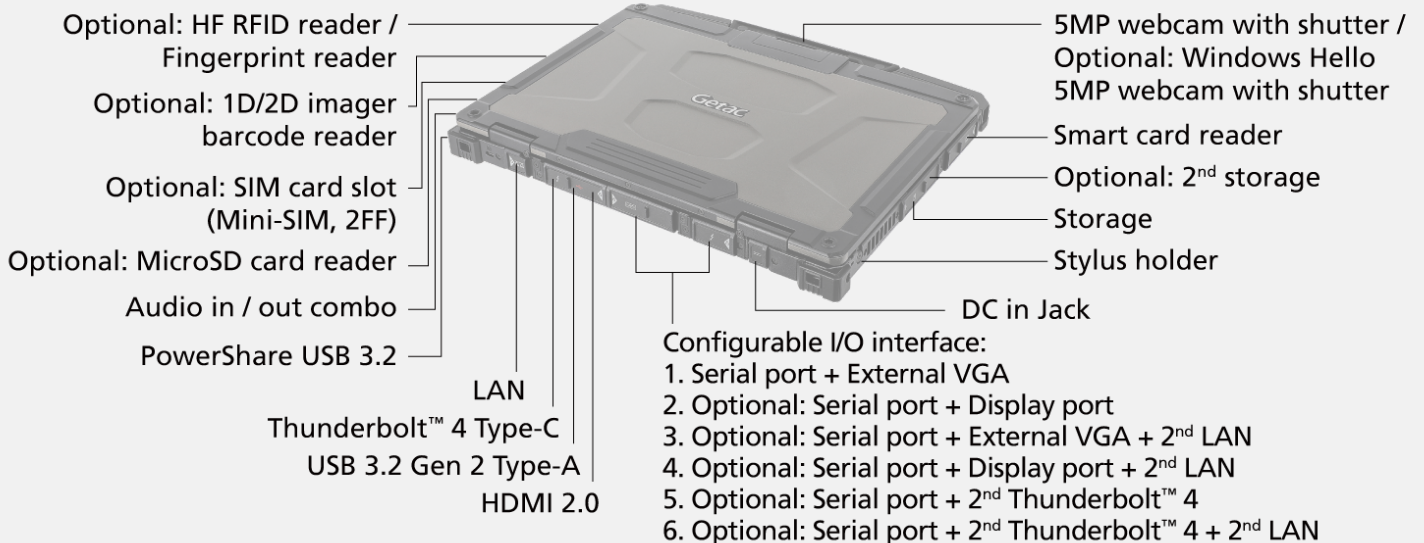

SPECIFICATIONS

Generation

G3

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ Ultra 5 processor 225H
Max. 4.9GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Platform options:

Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise
Max. 5.0GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H
Max. 5.1GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise
Max. 5.3GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Graphics

Intel® Arc™ Graphicsⁱ

NPU

Intel® AI Boost

Display

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB DDR5
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2nd storageⁱⁱ :
256GB / 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

LED backlit membrane keyboard

Pointing Device

Touchscreen
- Capacitive multi-touch screen

Touchpad

- Touchpad with two buttons

Expansion Slot

Smart card reader x 1
Optional: MicroSD card reader x 1
Optional: 1D/2D imager barcode reader

I/O Interface

5MP webcam x 1ⁱⁱⁱ
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF)^{iv}
Optional: Windows Hello face-authentication
5MP camera (front-facing) x 1ⁱⁱⁱ
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Configurable I/O options^v:

1. Serial port (9-pin; D-sub) x 1
+ External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1
+ External VGA (15-pin; D-sub) x 1
+ 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1
+ Display port x 1 + 2nd LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 1
+ 2nd Thunderbolt™ 4 Type-C x 1
6. Serial port (9-pin; D-sub) x 1
+ 2nd Thunderbolt™ 4 Type-C x 1
+ 2nd LAN (RJ45) x 1

Communication Interface

10/100/1000 base-T Ethernet
Intel® Wi-Fi 7 BE200, 802.11be
Bluetooth (v5.4)^{vi}
Optional: Dedicated GPS with L1/L5^{vii}
Optional: 4G LTE mobile broadband
with integrated L1/L5 GPS^{vii}
Optional: 5G Sub-6 with integrated L1/L5 GPS^{vii, viii}
Optional: Dual SIM (Mini-SIM 2FF and e-SIM)^{ix, ix}

Security Feature

TPM 2.0
Kensington lock
Smart card reader
Optional: Fingerprint reader^x
Optional: HF RFID reader^{x, xi}

Power

AC adapter (90W, 100-240VAC, 50/60Hz)
Li-ion battery (7.72V, typical 4060mAh; min. 3857mAh) x 2
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 34.9mm (13.46" x 11.06" x 1.37")
2.32kg (5.11lbs)^{xii}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{xiii}
Vibration & 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)^{xiv}
Optional: Salt fog certified

Environmental Specification

Temperature^{xv} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Barcode Manager^{xvi}
Optional: Absolute Persistence®

Optional Software

Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{xvii}

Accessories

Li-ion battery (7.72V, typical 4060mAh; min. 3857mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Office dock AC adapter (120W, 100-240VAC)
ML-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle^{xviii}
Vehicle dock^{xviii}
Office dock
Spare SSD kit
100W Type-C adapter

Bumper-to-Bumper Warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Bumper-to-Bumper

B360 FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- III. 5MP webcam and optional Windows Hello face-authentication 5MP camera (front-facing) are mutually exclusive options.
- IV. Units with 4G/5G option come with an embedded SIM card slot.
- V. External VGA, Display port, and 2nd Thunderbolt™ 4 Type-C are mutually exclusive.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VIII. Only available in the US, UK, EU, Australia, and New Zealand.
- IX. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- X. Fingerprint reader and HF RFID reader are mutually exclusive.
- XI. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FelICa™ compliant).
- XII. Weight and dimensions vary from configurations and optional accessories.
- XIII. ML-STD-461 90W AC adapter sold separately.
- XIV. Available with limited configurations and environment conditions.
- XV. Tested by an independent third-party test lab following MIL-STD-810H.
- XVI. Available when barcode reader option is selected.
- XVII. Models require either embedded or standalone GPS module.
- XVIII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Getac

GETAC TECHNOLOGY CORPORATION

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/

Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only, available specification shall be subjected to
quotation by request.